



BES2710IA

Brief Datasheet

Ultra-low Power Bluetooth Audio Platform for Smart Speakers

CONTACT US:

Company: Bestechnic (Shanghai) Co., Ltd. (“BES”)

Address: 2F, Building B, Lane 2889 Jinke Road, Pudong, Shanghai (201203)

Phone: (86)21 6877 1788

For product inquiries and more information, please visit www.bestechnic.com.


DISCLAIMER:

No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of BES. BES retains the right to make changes to this document at any time, without notice. BES makes no warranty of any kind, expressed or implied, with regard to any information contained in this document, including, but not limited to, the implied warranties of merchant ability or fitness for any particular purpose. Further, BES does not warrant the accuracy or completeness of the information, text, graphics, or other items contained within this document.

1 General Description

The BES2710IA is an ultra-low power Bluetooth audio SoC for portable speakers. The platform incorporates a high performance CPU subsystem comprising a dual-core STAR-MC1 processor with a dual-core BECO NPU, a BES proprietary coprocessor for advance signal processing and NN workloads, RAM/ROM, PSRAM and serial flash for software features and product customization, as well as a variety of interfaces. This combination minimizes external components and reduces BOM costs.

The platform incorporates a dual-mode Bluetooth 6.1 subsystem for Bluetooth classic and LE audio, a codec subsystem, and a Power Management Unit (PMU). It is fabricated by using an advanced low-power CMOS process and assembled within an 83-pin QFN package.

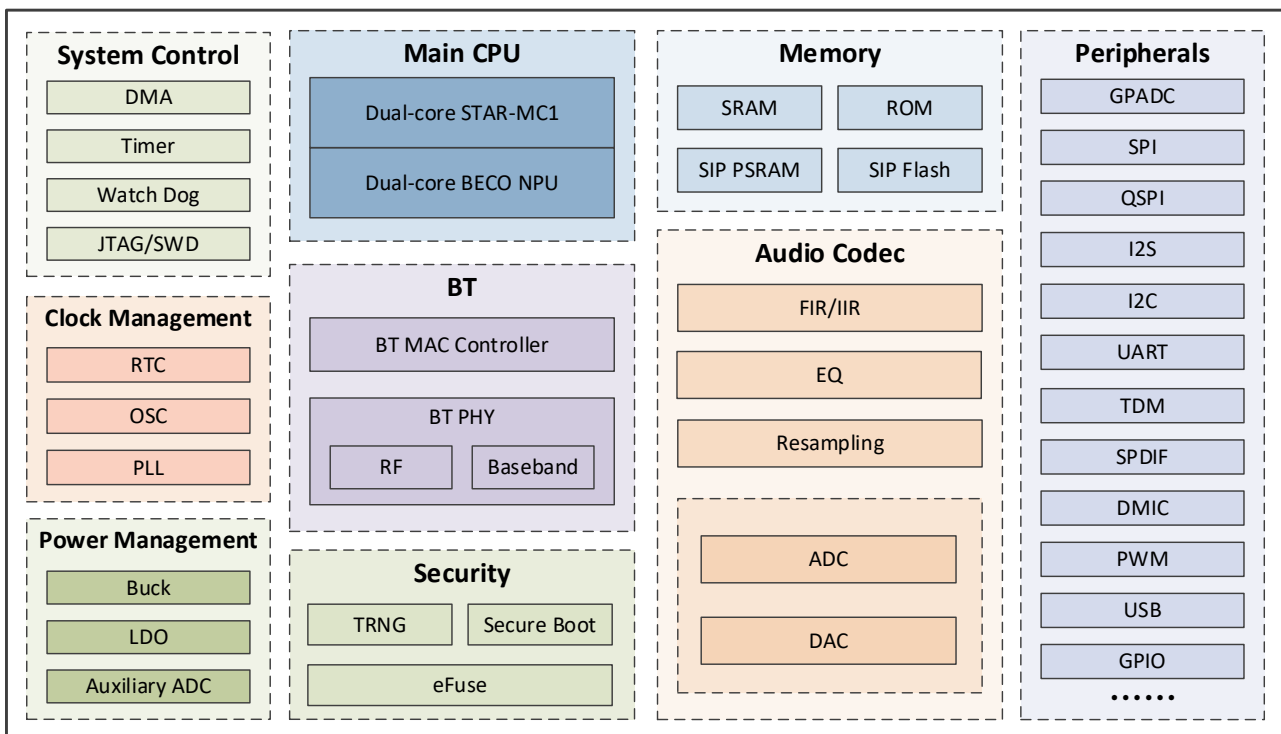

System Block Diagram

1.1 Applications

- Bluetooth portable speakers
- Other portable audio devices

1.2 Features & Specifications*

CPU Subsystem	Dual-core STAR-MC1
Memory and Storage	Shared 768 KB SRAM
	Flash in package boot ROM
Bluetooth Subsystem	Dual-mode BT 6.1 with LE audio
Audio & Voice Features	2x DACs
	3x ADCs
Peripheral Interfaces	GPADC/SPI/QSPI/I2S/I2C/UART/TDM/SPDIF/DMIC/PWM/USB/GPIO.....
Package	83-L QFN

* The content in the table is subject to change without notice.